









A service of Wesworth Electric, Inc.

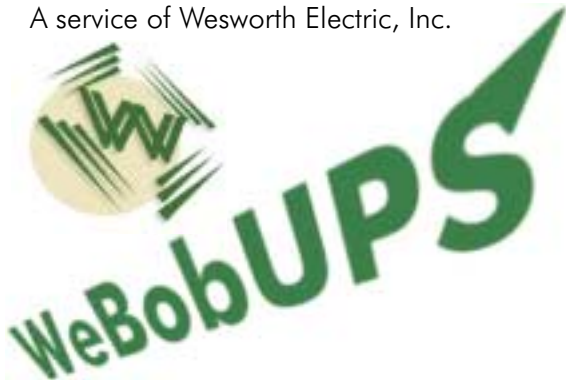

Selection Guide to UPS Units for typical equipment

		<i>Estimated Power Needs</i>	<i>Suggested Model</i>	<i>Approx Runtime</i>
	Basic Computer Pentium 4 w/ 17" CRT or LCD screen	300 va	Desktop 1250/1400	1h 10m
	Workstation Pentium 4 w/ 21" CRT screen	520 va	Tower 2200	1h 15m
	Basic Email/Data Server Pentium 4 w/ 2 drives 120volt / 15amp plug	426 va	Tower 2200	2h 2m
	Basic Rack Server Pentium 4 w/ router, switch (120v/15a)	428 va	Rack 3U 3000	1h 28m
	Application Server Intanium Chips, 4+ drives (208v/30a)	1148 va	Maxtrix 3000 w/ 2SC	1h 3m
	Router / DSL Switch (or other main entry telcom device) & 24port hub	70 va	Rack 3U 2200VA	4h 2m
	Basic Phone System 12-48 line PBX type 120v/15a	100 va	Tower 2200	5h 38m

**Call for complete sizing and design
954-545-8171**